

- ◇ STRUCTURE Silicon Monolithic Integrated Circuit
 ◇ PRODUCT I²C BUS Serial EEPROMs
 ◇ SERIES SIGNATURE SERIES
 ◇ FAMILY BR24C□□ family
 ◇ TYPE Supply voltage 4.5V~5.5V/Operating temperature -40°C~+85°C type
 ◇ PART NUMBER BR24C□□-□□6TP

PART NUMBER	PACKAGE	DENSITY
BR24C01-MN6TP	SO8 narrow	1Kbit
BR24C02-MN6TP		2Kbit
BR24C04-MN6TP		4Kbit
BR24C08-MN6TP		8Kbit
BR24C16-MN6TP		16Kbit
BR24C32-MN6TP		32Kbit
BR24C64-MN6TP		64Kbit
BR24C01-DW6TP	TSSOP8	1Kbit
BR24C02-DW6TP		2Kbit
BR24C04-DW6TP		4Kbit
BR24C08-DW6TP		8Kbit
BR24C16-DW6TP		16Kbit
BR24C32-DW6TP		32Kbit
BR24C01-DS6TP	TSSOP8 3 × 3mm ²	1Kbit
BR24C02-DS6TP		2Kbit
BR24C04-DS6TP		4Kbit
BR24C08-DS6TP		8Kbit
BR24C16-DS6TP		16Kbit

◇ FEATURES

Two wire serial interface
 Endurance : 1,000,000 erase/write cycles
 Data retention : 40years
 Initial Data FFh in all address

◇ ABSOLUTE MAXIMUM RATING

Symbol	Parameter	Min	Max	Unit
Tstg	Storage Temperature	-65	125	°C
Vio	Terminal Voltage	-0.3	Vcc+0.3	V
Vcc	Supply Voltage	-0.3	6.5	V

◇ POWER DISSIPATION (Ta=25°C)

PACKAGE	Rating	Unit
SO8 narrow	450 *1	mW
TSSOP8	330 *2	mW
TSSOP8 3 × 3mm ²	310 *3	mW

* Degradation is done at 4.5mW/°C(*1), 3.3mW/°C(*2), 3.1mW/°C(*3) for operation above 25°C

◇ RECOMMENDED OPERATING CONDITION

Symbol	Parameter	Min	Max	Unit
V _{CC}	Supply Voltage	4.5	5.5	V
T _A	Ambient Operating Temperature	-40	85	°C

◇ DC OPERATING CHARACTERISTICS

(Unless otherwise specified Ta=-40~85°C, V_{CC}=4.5~5.5V)

Parameter	Symbol	Min	Max	Unit	Test condition
Input Leakage Current (SCL, SDA)	I _{IL}	-	±2	μA	V _{IN} =V _{SS} or V _{CC}
Output Leakage Current	I _{OL}	-	±2	μA	V _{OUT} =V _{SS} or V _{CC} (SDA in Hi Z)
Supply Current	I _{CC}	-	2	mA	V _{CC} =5V, F _C =400kHz
Stand-by Supply Current	I _{CC1}		1+1 10+2	μA	V _{IN} =V _{SS} or V _{CC} , V _{CC} =3V
Input Low Voltage (E2, E1, SCL, SDA)	V _{IL}	-	0.3V _{CC}	V	
Input Low Voltage (WC)	V _{IL}	-	0.5+1 0.3V _{CC} +2	V	
Input High Voltage (E2, E1, SCL, SDA, WC)	V _{IH}	0.7V _{CC}		V	
Output Low Voltage	V _{OL}	-	0.4	V	I _{OL} =3mA, V _{CC} =5V

*1 BR74C01/02/04/08/16

*2 BR24C02/64

◇ AC OPERATING CHARACTERISTICS

(Unless otherwise specified Ta=-40~85°C, V_{CC}=4.5~5.5V)

Parameter	Symbol	Min	Max	Unit
Clock Frequency	f _C	-	400	kHz
Clock Pulse Width High	t _{PHL}	600		ns
Clock Pulse Width Low	t _{LOL}	1000	-	ns
SDA Fall Time τ _F	t _{FA}	20	500	ns
Data In Set Up Time	t _{SIU}	100	-	ns
Data In Hold Time	t _{SIH}	0		ns
Data Out Hold Time	t _{SOH}	200	-	ns
Dark Level to Read Data Val.(Access Time)	t _{RDV}	200	900	μs
Start Condition Set Up Time	t _{SUS}	600	-	ns
Start Condition Hold Time	t _{SH}	600	-	ns
Stop Condition Set Up Time	t _{SUS}	600	-	ns
Time between Stop Condition and Next Start Condition	t _{BS}	1.500	-	ns
Write Time	t _W	-	2	μs

*1 Not 100% TESTED

○ This product is not designed for protection against radioactive rays.

◇ BLOCK DIAGRAM

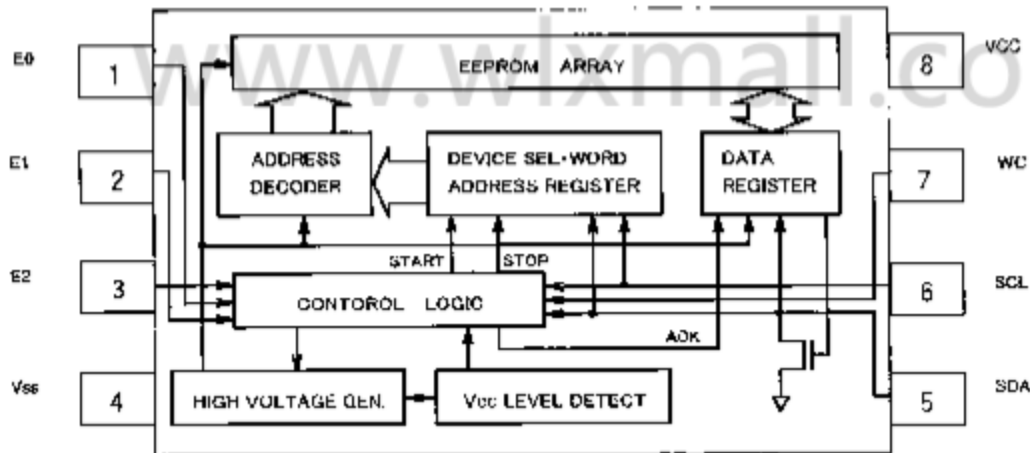


Fig.-1 BLOCK DIAGRAM

◇ PIN No., PIN NAME

PIN No.	PIN NAME
1	E0
2	E1
3	E2
4	V _{SS}
5	SDA
6	SCL
7	WC
8	V _{CC}

◆NOTES FOR POWER SUPPLY

V_{CC} rises through the low voltage region in which internal circuit of IC and the controller are unstable, so that device may not work properly due to an incomplete reset of internal circuit. To prevent this, the device has the feature of P.O.R. and LVCC. In the case of power up, keep the following conditions to ensure functions of P.O.R. and LVCC.

1. It is necessary to be "SDA='H'" and "SCL='L' or 'H'".
2. Follow the recommended conditions of t_R, t_{OFF}, V_{bot} for the function of P.O.R. during power up.

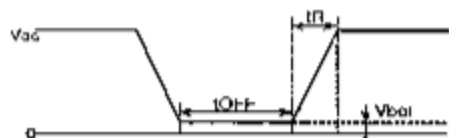


Fig.-2 V_{CC} RISING WAVEFORM

◆RECOMMENDED CONDITIONS OF t_R, t_{OFF}, V_{bot}

t _R	t _{OFF}	V _{bot}
Below 10ms	Above 10ms	Below 0.3V
Below 100ms	Above 10ms	Below 0.2V

3. Prevent SDA and SCL from being "High-Z".

In case that condition 1. and/or 2. cannot be met, take following actions.

- A) Unable to keep condition 1.
(SDA is "LOW" during power up.)
→ Control SDA, SCL to be "HIGH" as Fig-3(a), 3(b).
- B) Unable to keep condition 2.
→ After power becomes stable, execute software reset.
- C) Unable to keep both conditions 1 and 2.
→ Follow the instruction A first, then the instruction B.



Fig.-3(a) SCL='H' and SDA='L'

Fig.-3(b) SCL='L' and SDA='L'

◆CAUTIONS ON USE

- (1) Absolute maximum ratings

If the absolute maximum ratings such as impressed voltage and action temperature range and so forth are exceeded, LSI may be destructed. Do not impress voltage and temperature exceeding the absolute maximum ratings. In the case of fear exceeding the absolute maximum ratings, take physical safety countermeasures such as fuses, and see to it that conditions exceeding the absolute maximum ratings should not be impressed to LSI.

- (2) V_{SS} electric potential

Set the voltage of V_{SS} terminal lowest at any action condition. Make sure that each terminal voltage is lower than that of V_{SS} terminal.

- (3) Thermal design


In consideration of permissible loss in actual use condition, carry out heat design with sufficient margin.

- (4) Terminal to terminal shortcircuit and wrong packaging

When to package LSI onto a board, pay sufficient attention to LSI direction and displacement. Wrong packaging may destruct LSI. And in the case of shortcircuit between LSI terminals and terminals and power source, terminal and V_{SS} owing to foreign matter, LSI may be destructed.


- (5) Use in a strong electromagnetic field may cause malfunction, therefore, evaluated design sufficiently.

◇ PHYSICAL DIMENSION

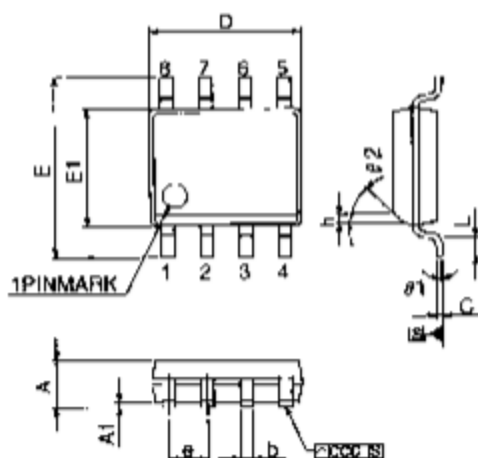


- Notes
- 1.This drawing is subject to change without notice.
 - 2.Body dimensions do not include mold flash or protrusion, or gate burrs.
 - 3.Reference JEDEC MS-012 variation AA.

Fig-4 SO8 narrow Package Outline

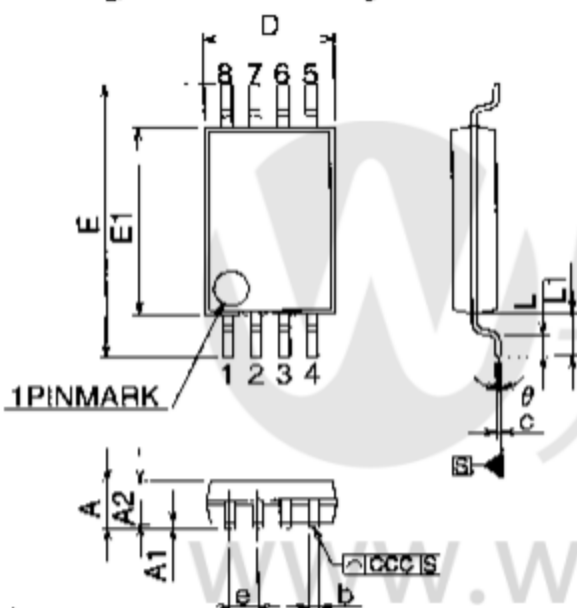

- Notes
- 1.This drawing is subject to change without notice.
 - 2.Body dimensions do not include mold flash or protrusion, or gate burrs.
 - 3.Reference JEDEC MO-153 variation AA.

Fig-5 TSSOP Package Outline

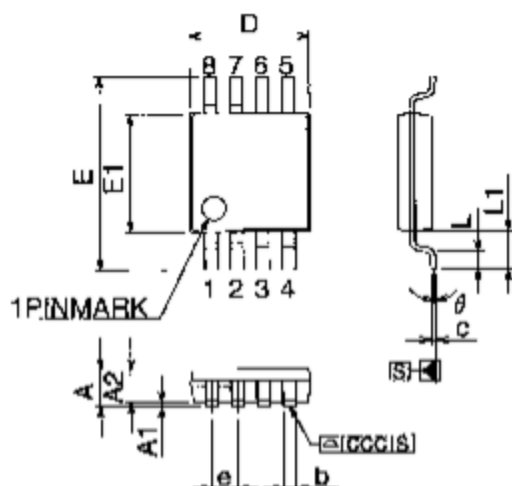

- Notes
- 1.This drawing is subject to change without notice.
 - 2.Body dimensions do not include mold flash or protrusion, or gate burrs.
 - 3.Reference JEDEC MO-187 variation AA.

Fig-6 TSSOP 3 × 3mm² Package Outline

◇ SO8 narrow Package size data

Symb.	mm			inches		
	Typ.	Min.	Max.	Typ.	Min.	Max.
A	-	1.35	1.75	-	0.053	0.069
A1	-	0.10	0.25	-	0.004	0.010
b	-	0.33	0.51	-	0.013	0.020
c	-	0.19	0.25	-	0.007	0.010
D	-	4.80	5.00	-	0.189	0.197
e	1.27	-	-	0.050	-	-
E	-	5.80	6.20	-	0.228	0.244
E1	-	3.80	4.00	-	0.150	0.157
L	-	0.40	1.27	0.050	0.016	0.050
θ 1	-	0°	8°	-	0°	8°
ccc	-	-	0.10	-	-	0.004
h	-	0.25	0.50	-	0.010	0.020
θ 2	45°	-	-	45°	-	-

◇ TSSOP8 Package size data

Symb.	mm			inches		
	Typ.	Min.	Max.	Typ.	Min.	Max.
A	-	-	1.200	-	-	0.0472
A1	-	0.050	0.150	-	0.0020	0.0059
A2	1.000	0.800	1.050	0.0394	0.0315	0.0413
b	-	0.190	0.300	-	0.0075	0.0118
c	-	0.090	0.200	-	0.0035	0.0079
D	3.000	2.900	3.100	0.1181	0.1142	0.1220
e	0.650	-	-	0.0256	-	-
E	6.400	6.200	6.600	0.2520	0.2441	0.2598
E1	4.400	4.300	4.500	0.1732	0.1693	0.1772
L	0.600	0.450	0.750	0.0236	0.0177	0.0295
L1	1.000	-	-	0.0394	-	-
ccc	-	-	0.100	-	-	0.0039
θ	-	0°	8°	-	0°	8°

◇ TSSOP8 3 × 3mm² Package size data

Symb.	mm			inches		
	Typ.	Min.	Max.	Typ.	Min.	Max.
A	-	-	1.100	-	-	0.0433
A1	-	0.050	0.150	-	0.0020	0.0059
A2	0.850	0.750	0.950	0.0335	0.0295	0.0374
b	-	0.250	0.400	-	0.0098	0.0157
c	-	0.120	0.230	-	0.0047	0.0091
D	3.000	2.900	3.100	0.1181	0.1142	0.1220
e	0.650	-	-	0.0256	-	-
E	4.900	4.650	5.150	0.1929	0.1831	0.2028
E1	3.000	2.900	3.100	0.1181	0.1142	0.1220
L	0.550	0.400	0.700	0.0217	0.0157	0.0276
L1	0.950	-	-	0.0374	-	-
ccc	-	-	0.100	-	-	0.0039
θ	-	0°	6°	-	0°	6°

笔记

- 本文档的技术内容页面不得以任何形式复制或传播
意味着未经ROHM CO., LTD事先许可。
- 此处所述的内容如有更改，恕不另行通知。规格
本文档中描述的产品仅供参考。因此，在实际使用时，请提出要求
该规格将分开交付。
- 这里包含的应用电路图和电路常数是标准的例子
使用和操作。设计电路时请注意外围条件
并确定该组中的电路常数。
- 任何数据，包括但不限于此处描述的应用电路图信息
仅用于说明此类设备，而不是作为此类设备的规格说明。ROHM
有限公司。对任何使用此类设备的行为不得有任何侵权行为不承担任何保证
第三方的知识产权或其他所有权，并进一步，不承担任何责任
任何此类侵权行为的性质，或与之相关或与之相关或与之相关的任何性质
到这些设备的使用。
- 在出售任何此类设备后，除买方有权自行使用此类设备外，转售或以其他方式转售
否则处置相同的，没有明示或暗示的权利或执照或商业
利用其所拥有或控制的任何知识产权或其他专有权利
- 罗姆株式会社授予任何此类买方。
- 本文档中列出的产品不是抗辐射设计。

本文档中列出的产品旨在与普通电子设备或设备一起使用
(如视听设备，办公自动化设备，通讯设备，电器
电器和电子玩具)。

如果您打算将这些产品用于需要极高水平的设备或设备
可靠性和故障会直接危及人的生命(如医疗器械，
运输设备，航空航天机械，核反应堆控制器，燃料控制器等
安全装置)，请务必事先咨询我们的销售代表。

关于日本的出口管制令

本文所述的产品是出口贸易管制附件1(第16项)中的受管制物品
在日本订购。

如果是日本出口，请确认它是否适用于“客观”标准或“知情”(由MITI条款)
以“抓住所有对不扩散大规模毁灭性武器的控制”为基础。

感谢您访问ROHM产品信息.

更详细的产品信息和目录可用,

请联系最近的销售办事处.

详情请联系我们的销售办事处.

美国/圣地亚哥	电话: +1 (858)625-3630	传真: +1 (858)625-3670
亚特兰大	电话: +1 (770)754-5972	传真: +1 (770)754-0691
达拉斯	电话: +1 (972)312-8818	传真: +1 (972)312-0330
德国/杜塞尔多夫	电话: +49 (2154) 9210	传真: +49 (2154) 921400
英国/伦敦	电话: +44 (1) 908-282-666	传真: +44 (1) 908-282-528
法国/巴黎	电话: +33 (0) 1 56 97 30 60	传真: +33 (0) 1 56 97 30 80
中国/香港	电话: +852 (2) 740-6262	传真: +852 (2) 375-8971
上海	电话: +86 (21) 6279-2727	传真: +86 (21) 6247-2066
姐妹恋	电话: +86 (411) 8230-854	传真: +86 (411) 8230-8537
北京	电话: +86 (10) 8525-2483	传真: +86 (10) 8525-2489
台湾/台北	电话: +866 (2) 2500-6956	传真: +866 (2) 2503-2869
韩国/首尔	电话: +82 (2) 8182-700	传真: +82 (2) 8182-715
新加坡	电话: +65-6332-2322	传真: +65-6332-5662
马来西亚/吉隆坡	电话: +60 (3) 7958-8355	传真: +60 (3) 7958-8377
菲律宾/马尼拉	电话: +63 (2) 807-6872	传真: +63 (2) 809-1422
泰国/曼谷	电话: +66 (2) 254-4890	传真: +66 (2) 256-6334

日本 /
(内部销售)

东京	东京都中央区八重2-1-1, 邮编: 104-0082 电话: +81 (3) 5203-0321 传真: +81 (3) 5203-0300
横滨	神奈川县横滨市港北区新横滨2-4-8 电话222-8575 电话: +81 (45) 476-2131 传真: +81 (45) 476-2128
名古屋	爱知县名古屋市中村区梅野3-12-12号Dainagayo大厦450-0002 电话: +81 (52) 581-8521 传真: +81 (52) 561-2173
京都	579-32东石口寺町, 乌丸西区, 石口井道, 下京区, 京都600-8216 电话: +81 (75) 311-2121 传真: +81 (75) 314-6559

(日本海外客户的联系地址)

横滨	电话: +81 (45) 476-9270 传真: +81 (045)476-9271
----	---