

v9/16.06.22




International Presence

www.melexis.com/sales-contact

Europe, Middle East and Africa
sales_europe@melexis.com

Asia and Oceania
sales_asia@melexis.com

Americas
sales_usa@melexis.com

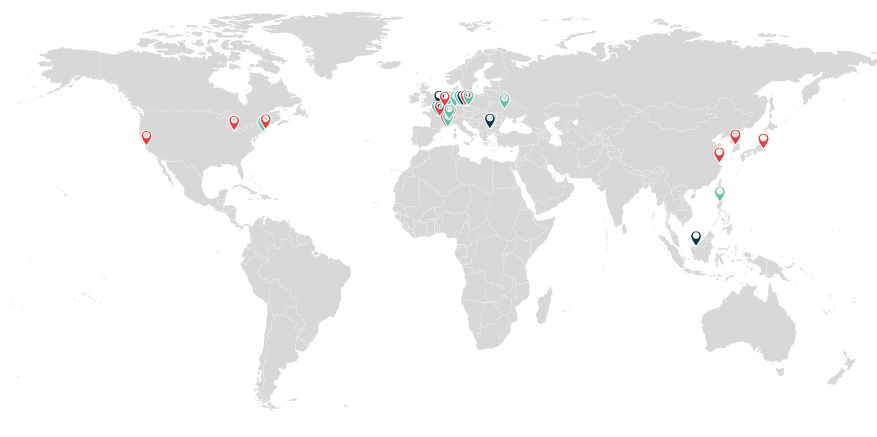

-  Research & Development
-  Sales & Applications
-  Manufacturing



WWW.MELEXIS.COM



SELECTION GUIDE

TRIAxis® POSITION SENSOR FOR AUTOMOTIVE AND INDUSTRIAL APPLICATIONS

We are a pioneer in programmable angular and linear Hall sensors for rotary, linear, and joystick motion. Our devices offer improved manufacturability of sensor assemblies and modules. Our technology and innovations support a broad range of applications in automotive markets and beyond.

Thanks to its magnetic compass the fascinating honey bee has the ability to perceive the omnipresent magnetic field (MF) of the Earth. This magnetic field sensitivity matches this wonderful creature with our Triaxis® magnetic sensors.

Triaxis® Value Optimied Sensing - for embedded applications using an external microcontroller	IC part number	Status	Motion				Magnetic Range		Data Rate	Supply	Idd	Output						Operating Temperature [°C]					Angular processing	Field Mapping	Package				(A)SIL ready	Strayfield immunity ISO11452-8	AEC-Q100
			On-axis	Off-axis	Joystick (3D)	Linear	min - max [mT]	min. field [mT/mm] ⁴				Ratiometric Analog	PWM	SENT	SPC	I2C	Resolution [bit]	S: -20..85	E: -40..85	K: -40..125	L: -40..150	G: -40..160			SMD SOIC-8	SMD TSSOP-16 ²	SMD QFN-16	SMD UTDFN-8			
	MLX90395	prod	✓	✓	✓	✓	5 - 50 / 10 - 120		2	2.6 to 3.6	0.234				✓	✓	16			✓			off	B _x / B _y / B _z	✓	✓	✓				✓

Triaxis® Mainstream Sensing - for optimum applications with typical features	IC part number	Status	Motion				Magnetic Range		Data Rate	Supply	Idd	Output						Operating Temperature [°C]					Angular processing	Field Mapping	Package					(A)SIL ready	Strayfield immunity ISO11452-8	AEC-Q100
			On-axis	Off-axis	Joystick (3D)	Linear	min - maxB _{x/y} [mT]	min. field [mT/mm]				Ratiometric Analog	PWM	SENT	SPI	I2C	Resolution [bit]	S: -20..85	E: -40..85	K: -40..125	L: -40..150	G: -40..160			SMD SOIC-8	SMD TSSOP-16 ²	PCBless ¹ DMP-4	PCBless ¹ SMP-3	PCBless ¹ SMP-4			
	MLX90316	prod	✓				20 - 70		2 / 5 ³	5	8.5 / 13.5 ³	✓	✓		✓		12	✓	✓	✓	✓		on	XY	✓	✓						✓
	MLX90324	prod	✓				20 - 70		3.4	5	7 / 12.5 ³	✓	✓	✓			12				✓		on	XY	✓	✓						✓
	MLX90333	prod		✓	✓	✓	20 - 70		1	5	8.5 / 13.5 ³	✓	✓		✓		12		✓	✓	✓		on	XZ / YZ	✓	✓						✓
	MLX90340	prod	✓	✓		✓	20 - 70		3.4	5	13.5	✓	✓				12	✓	✓		✓		on	XY / XZ / YZ	✓	✓						✓
	MLX90363	prod	✓	✓	✓	✓	20 - 70		1	3.3 / 5	12.5				✓		12		✓	✓	✓		on/off	XY / XZ / YZ	✓	✓				B ⁷		✓
	MLX90364	prod	✓	✓		✓	20 - 70		3.4	5	6	✓	✓				12				✓		on	XY / XZ / YZ			✓			B ⁶		✓
	MLX90365	prod	✓	✓		✓	20 - 70		3.4	5	6	✓	✓				12		✓	✓	✓		on	XY / XZ / YZ	✓	✓				B ⁶		✓
	MLX90366	prod	✓	✓		✓	20 - 70		1.1	5	6	✓	✓				12				✓		on	XY / XZ / YZ			✓			B ⁶		✓
	MLX90367	prod	✓	✓		✓	20 - 70		1.1	5	6	✓	✓				12		✓	✓	✓		on	XY / XZ / YZ	✓	✓				B ⁶		✓
	MLX90421	prod	✓	✓		✓	10 - 70		2.2	5	8.5	✓	✓				12					✓	on	XY / XZ / YZ	✓	✓	✓	✓	✓	B		✓
	MLX90422	prod	✓	✓		✓	10 - 70		1.1	5	8.5			✓			12					✓	on	XY / XZ / YZ	✓	✓	✓	✓	✓	B		✓
	MLX90423	sample				✓	10 - 70	1.5 - 6	4.7	5 / 12 ⁵	9 / 11	✓	✓	✓			12					✓	on	XY / XZ / YZ	✓	✓		✓		B	5mT	✓
	MLX90425	prod	✓					10	1.9	5	10	✓	✓				12					✓	on	XY / XZ / YZ	✓	(✓) ⁽⁸⁾		✓	(✓) ⁽⁸⁾	B	5mT	✓
	MLX90426	prod	✓					10	1.1	5	10			✓			12					✓	on	XY / XZ / YZ	✓	(✓) ⁽⁸⁾		✓	(✓) ⁽⁸⁾	B	5mT	✓

Triaxis® Performance Sensing	Triaxis® Performance Sensing - for demanding applications																															
	IC part number	Status	Motion				Magnetic Range		Data Rate	Supply	Idd	Output						Operating Temperature [°C]					Angular processing	Field Mapping	Package					(A)SIL ready	Strayfield immunity ISO11452-8	AEC- Q100
			On-axis	Off-axis	Joystick (3D)	Linear	min - maxB _{XY} [mT]	min. field [mT/mm]	[kHz]	[V]	[mA]	Ratiometric Analog	PWM	SENT	SPC	PSI5	Resolution [bit]	S: -20..85	E: -40..85	K: -40..125	L: -40..150	G: -40..160			SMD SOIC-8	SMD TSSOP-16²	PCBless¹ DMP-4	PCBless¹ SMP-3	PCBless¹ SMP-4			
	MLX90371	prod	✓	✓		✓	10 - 70	3.8 - 10	2.3	5	10	✓	✓				12				✓	on	XY / XZ/ YZ	✓	✓	✓		✓	B	5mT	✓	
	MLX90372	prod	✓	✓		✓	10 - 70	3 - 10	1	5 / 12³	10		✓	✓			12				✓	on	XY / XZ/ YZ	✓	✓	✓			C	5mT	✓	
MLX90373	prod	✓	✓		✓	10 - 70	4.1 - 10	1	5 / 12³	11					✓	12			✓		on	XY / XZ/ YZ		✓	✓			C	5mT	✓		
MLX90374	prod	✓	✓		✓	10 - 70	3 - 10	1	5 / 12³	10			dual	✓			12				✓	on	XY / XZ/ YZ	✓		✓			C	5mT	✓	
MLX90377	prod	✓	✓		✓	10 - 70	3 - 10	0.5 / 2.5	5 / 12³	9 / 13.5³	✓	✓	✓	✓		12 - 14					✓	on	XY / XZ/ YZ	✓	✓	✓	✓		C	5mT	✓	
MLX90378	prod			✓		10 - 70		1	5 / 12³	9			dual	✓			12				✓	on	XY / XZ/ YZ	✓	✓				C		✓	

Triaxis® Motor Position Sensing	Triaxis® Motor position sensing - for motor commutation solution with magnetic resolver																												
	IC part number	Status	Motion				Magnetic Range		Max. e-rpm ⁹	Supply	Idd	Output		Operating Temperature [°C]					Angular processing	Field Mapping	Package					(A)SIL ready	Strayfield immunity ISO11452-8	AEC- Q100	
			On- axis	Off- axis	Joystick (3D)	Linear	min - maxB _{xy} [mT]	min. field [mT/mm]		[V]	[mA]	Sine / Cosine		Resolution [bit]	S: -20..85	E: -40..85	K: -40..125	L: -40..150			G: -40..160	SMD SOIC-8	SMD TSSOP-16 ²	SMD DFN-6	PCBless ¹ SMP-3				PCBless ¹ SMP-4
MLX90380	prod	✓	✓			10 - 70		25'000	3.3 / 5	7 / 8	✓	sin/cos				✓		off	XY / XZ/ YZ	✓	✓				B ⁶		✓		
MLX90381	prod	✓	✓			10 - 70 / 40 - 160		50'000	3.3	4.2	✓	sin/cos					✓	off	XY / XZ/ YZ			✓			B		✓		

(1) Dual Mold Package (DMP) & Single Mold Package (SMP). PCBless packages are intended to be used without a PCB and with electrical connections made directly to a leadframe.
 (2) TSSOP-16 package include two dies with individual electrical connections, where full redundancy is needed.
 (3) Slow mode / Fast mode
 (4) Stray field robust mode utilizes a gradient field (mT/mm) while the traditional mode uses a homogenous field (mT).

(5) Extended mode (6-18V) selectable via EEPROM programming.
 (6) Safety applications supported by safety analysis report and safety manual via HW Evaluation under Clause 13 of ISO26262
 (7) Safety applications supported by safety analysis report and safety manual via Proven In Use process under Clause 14 of ISO26262
 (8) Sample stage
 (9) Electrical at Hall plates

SMD solutions



SOIC-8 (DC)



TSSOP-16 (GO)



QFN-16 (LW)



DFN-6 (LW)



UTDFN-8 (LQ)

PCB-less solutions



DMP-4 (VS)



SMP-3 (VE)



SMP-4 (VD)